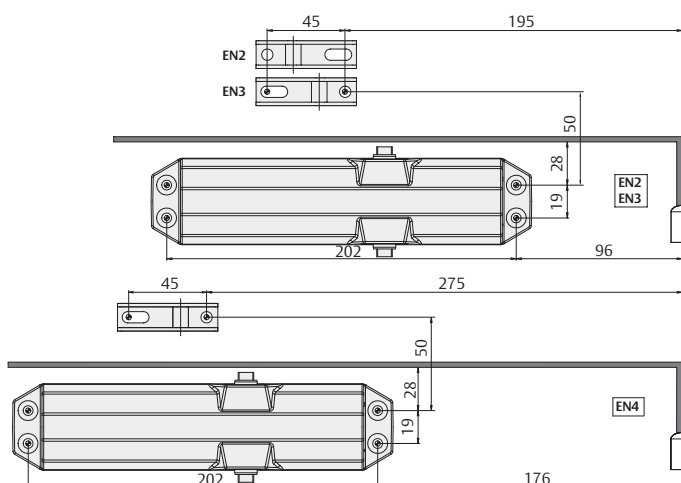
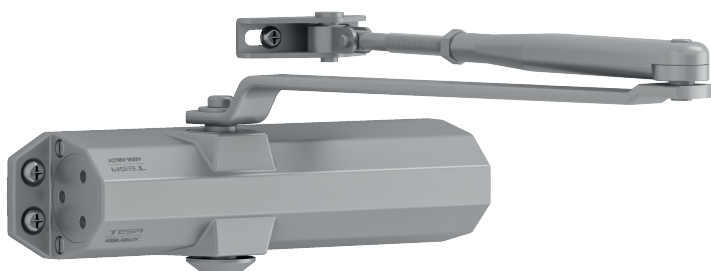


Characteristics

- The CT1800 series is an economical and compact door closer for a wide range of applications, and comes complete with body and arm
- Certified in compliance with EN 1154, size 2/3/4
- For single leaf doors up to 1100 mm width
- Suitable for fire and smoke protection doors (not for hold-open link arm)
- Can be used for left and right-handed doors
- Closing and latching speed adjustable via regulating valves

Technical attributes

Closing force	EN size 2/3/4
Maximum leaf width	1100 mm
Closing speed (S)	Variable between 180° and 15°
Latch speed (L)	Variable between 15° and 0°
Backcheck (BC)	No
Maximum opening angle	~ 180° (115° for EN size 4)
Hold- open angle	75° - 120 °
Door system	Single leaf
Handing	Left / right-handed
Mounting options	Leaf mounting on hinge side Frame mounting on non-hinge side
Force adjustment	No
Height adjustment	No
Corrosion resistance	Grade 3 (96 hours)

Model	Finish	Arm
CT180034NPL	Silver	Standard
CT180034NNE	Black	Standard
CT180034NBL	White	Standard
CT180034NOR	Gold (RAL 1004)	Standard
CT180034NBR	Bronze/Brown (RAL 8014)	Standard
CT180134NPL	Silver	Hold open
CT180134NNE	Black	Hold open
CT180134NBL	White	Hold open
CT180134NOR	Gold (RAL 1004)	Hold open
CT180134NBR	Bronze/ Brown (RAL 8014)	Hold open